


Technical Data

Potential free inputs	
Contact supply	Internal approximately 12.....16V
max. switching current	Approximately 10 mA

For the connection of the cables it is recommended to use rigid wires, e. g. bell wires!

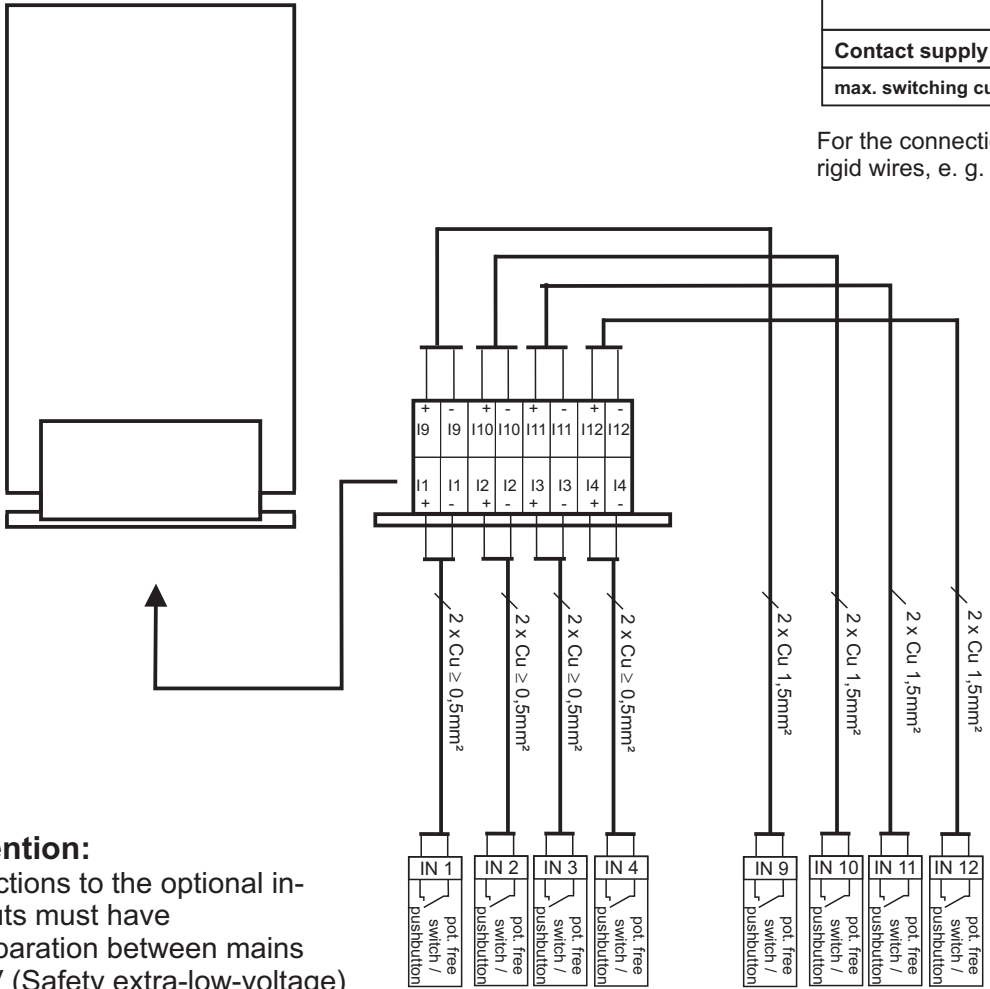

⚠ Attention:
 All connections to the optional in- and outputs must have a safe separation between mains and SELV (Safety extra-low-voltage) **danger of life !**

* * * *
 Prog. no.: Prog. no.: Prog. no.: Prog. no.:
 * * * *
 Prog. no.: Prog. no.: Prog. no.: Prog. no.:

Prog. function see enclosure Option programs
 Place of installation of the options board see installation instructions page 3.