Modifications via update module, release module or configuration module

When several changes are made, then in the following order: 1. Update module, 2. Release module, 3. Configuration module

Sauna control FCUxxxx

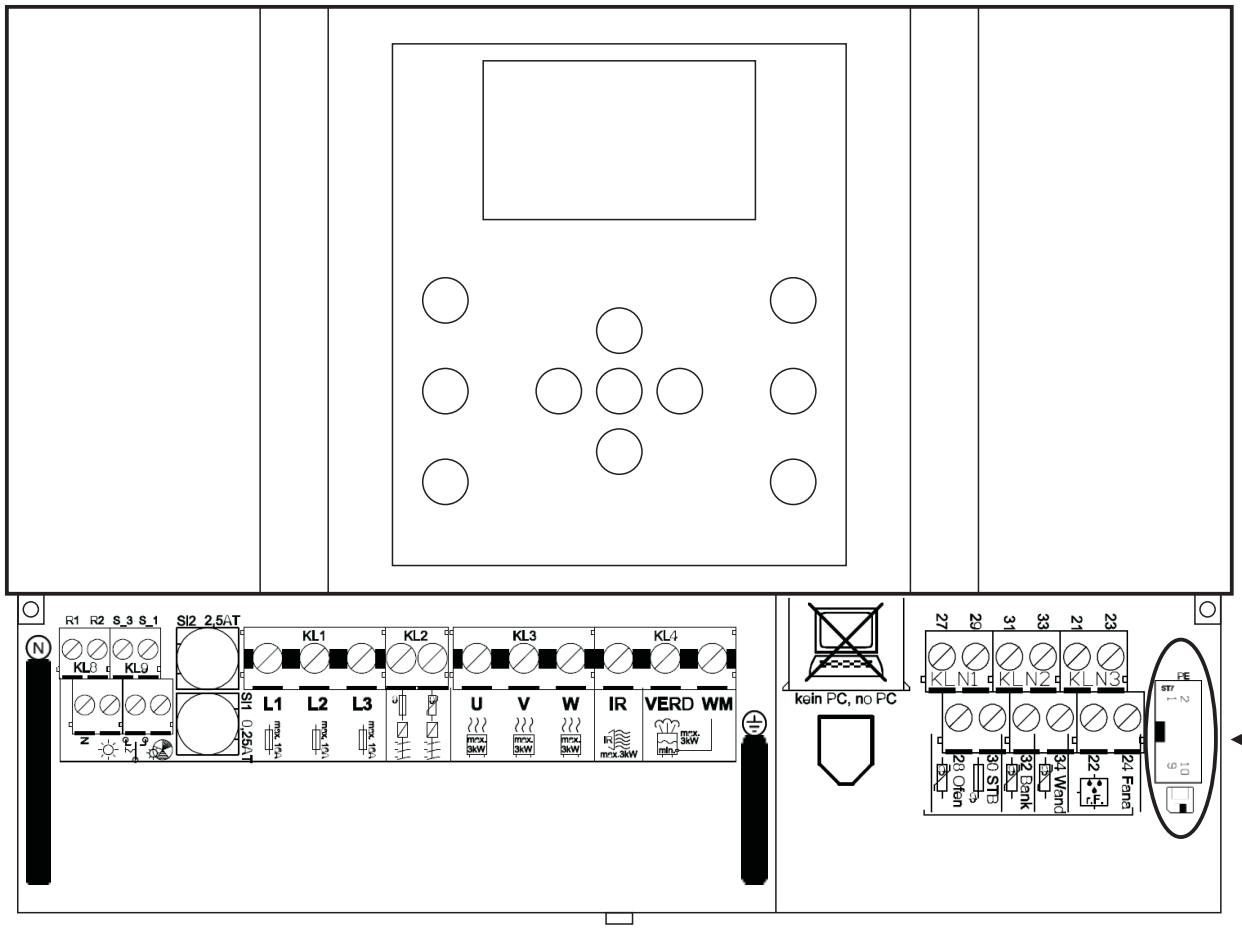

Software Update via update module (FCU-EXT-UPDATE-Modul) or release of an option program via release module (FCU-EXT-FREI-MODUL) or configuration via configurations module (FCU-EXT-CONFIGURATION-MODUL)

Attention: plugging in and out of the chip module is to be done only when the power is OFF!!!

1. Cut off the power supply. Disconnect the electronic supply with the help of the main switch or bring the FI saftey switch in the position OFF. Attention!!! The main switch does not cut off the voltage on the terminals!!!

2. Remove the lower cover from the casing. Insert the chip module. Switch on the mains again and follow the instructions on the display.

3. After the request “switch off mains”, cut off the power supply. Remove the chip-module and again screw the cover on.

After the release of an option program through the release module, you can find information on the function of the option program in the enclosed list of option programs. Information on the connecting terminals are available in the enclosed circuit diagram.

Attention: Do not cut off the power supply during the software update, otherwise the status of theprogram will be undefined and relays could be switching in an uncontrolled manner. However, if for any reason the power supply has been disconnected, then do not start using the control under any circumstances! In this case the board must be returned to restore the program.

Control Board FCUxxxx / modifications through the Up-Frei-Con-module	Prepared:	Modified:	File:	Rights reserved for technical changes
	Schmalz	Schmalz	Up-Frei-Con-Modul.cdr	
	12.2009	03.2010		**FASEL GmbH**