



# FNT 3000-

## Steam-Design

### Steam bath control

#### Key features:

- Elegant, high-quality glass touch control panel
- Simple, intuitive, language-neutral operation
- Low space requirement
- Low installation depth
- Display lighting signals heating status


#### Scope of delivery:

- 1 x control panel with touch display
- 1 x basic device / load unit
- 1 x 5m connection cable
- 1 x probe sensor for steam bath





## Technical data sheet


### Dimensions:

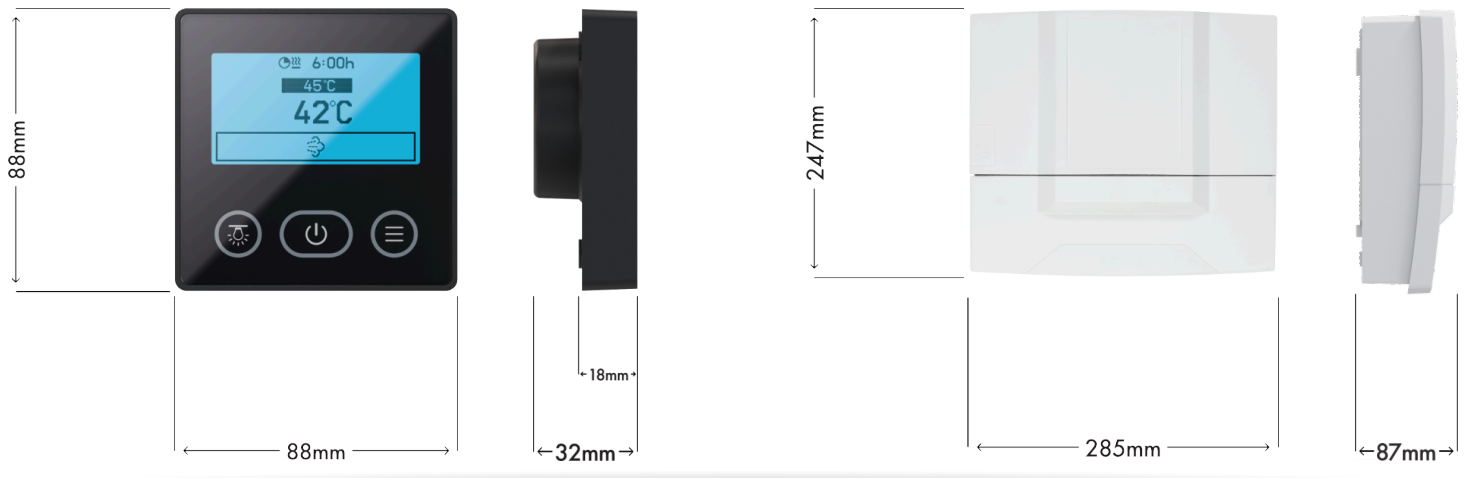

### Sensor and device assembly:

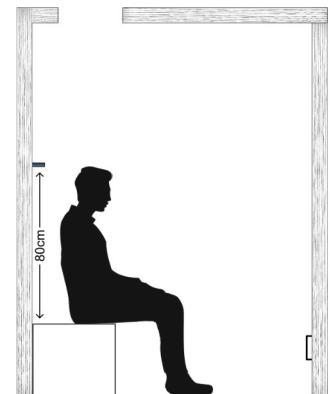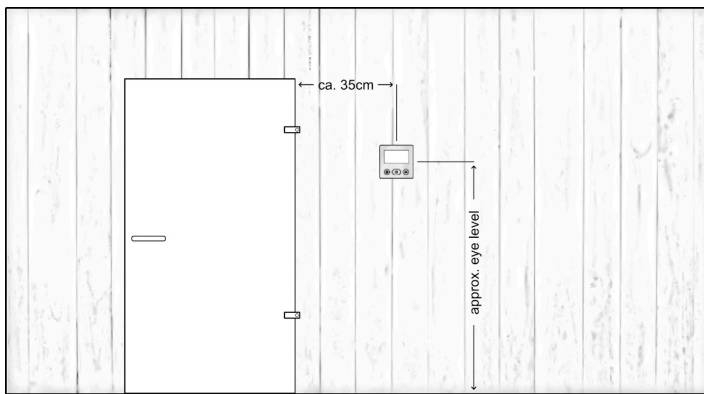

### connection diagram:

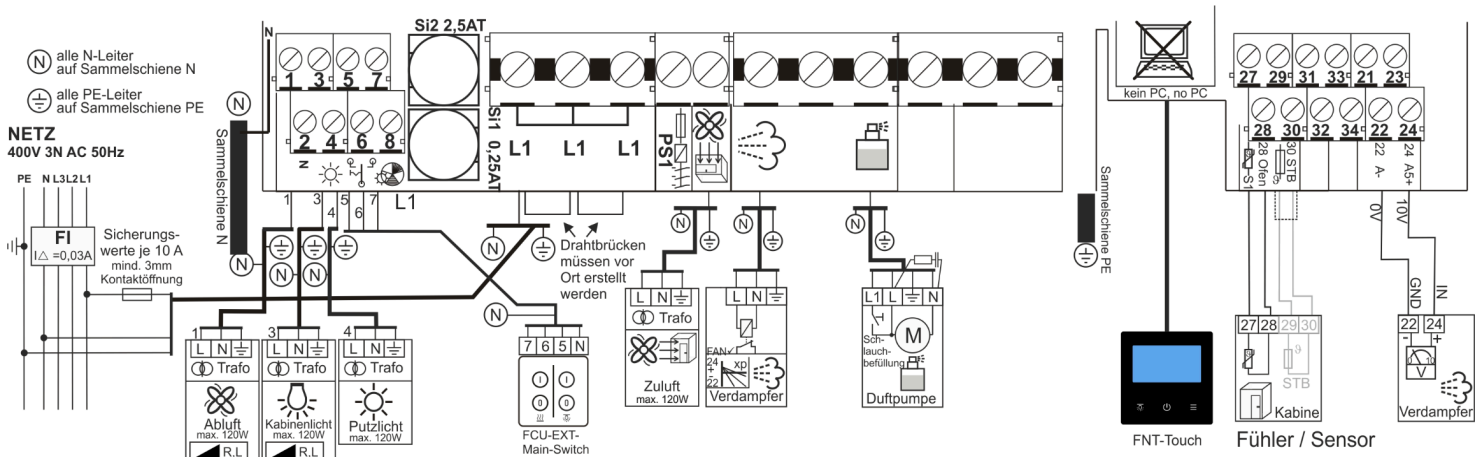

## Accessories

Description
probe sensor with 5m cable length
Protective coating on the circuit board for increased corrosion protection in the event of condensation
Stand-alone music module with 2x10W output power
2x50W speakers incl. 5m connecting cable
probe sensor for seat bench heating
Cabin interior display in black / white
Cabin interior control panel in black / white
Control unit for operation with smartphone or tablet via the Internet
Control unit for operation with smartphone or tablet via BT (approx. 5 m range)
Control unit for connection to KNX bus
Connection to an RGB(W) controller from Licht 2000
Option board with 0-10V output for controlling an LED dimmer
I/O card with potential-free inputs and outputs that can be assigned various software functions
Relay card with 230V relay outputs can be assigned various software functions
Door contact consisting of reed contact switch incl. 5.0 m connection cable and magnet

## Technical data

Item no.	Electrical connection	Switching capacity	Temperature range	Light connection	Fan connection	Heating time limit	Ambient Temperatures during operation	Weight with repacking
FNT3000-STEAM-DESIGN	230V 1N ~ 50Hz	Release for external evaporator  Optional bench heating 2kW	30-50°C	Max. 120W (resistive, inductive load)	Max. 120W (resistive, inductive load)	6h (max. 20h)	0 bis +40°C	2,6 Kg

Technical changes reserved